


通通锁门禁机

使用说明书 V1.0

一、产品主要技术参数

项目	指标	项目	指标
工作电压	AC/DC 12V-24V	用户容量	卡: 1000, 指纹: 100
工作电流	< 100mA	读卡类型	IC 卡
环境温度	-10℃—60℃	读卡距离	1—10CM
管理方式	通通锁 APP	通讯方式	蓝牙 / WiFi

二、接线示意图

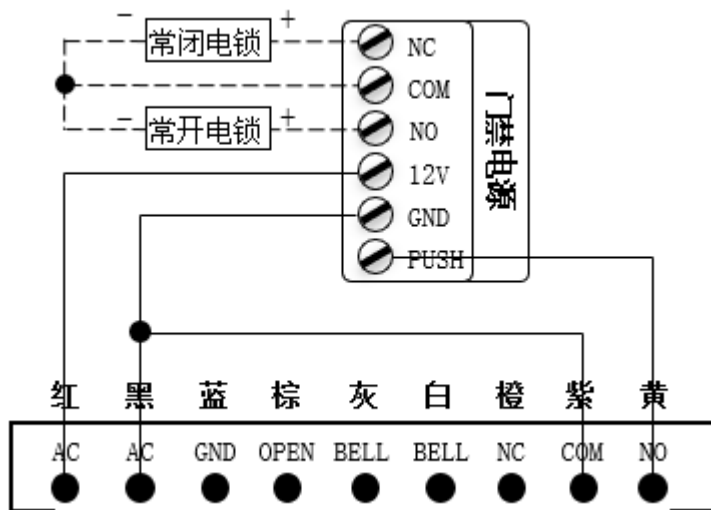

三、单机编程操作说明：默认开锁密码：123456

温馨提示：密码开锁请先点亮按键后输入密码按#键开锁

- 3.1、设置管理员密码：* 12 # 123456 # 输入管理员密码 # 再次输入同一密码 #
- 3.2、修改管理员密码：* 12 # 原管理员密码 # 新管理员密码 # 同一新管理员密码 #
- 3.3、添加手机管理员：* 83 # 管理员密码 #

- 3.4、添加密码：* 80 # 输入管理员密码 # 输入 6 位新密码 # 再次输入同一密码 #
- 3.5、添加指纹：* 80 # 输入管理员密码 # 根据语音提示按压手指
- 3.6、删除指纹：* 70 # 输入管理员密码 # 删除所有指纹
- 3.7、添加 IC 卡：* 80 # 输入管理员密码 # 刷卡
- 3.8、删除 IC 卡：* 69 # 输入管理员密码 # 删除所有 IC 卡
- 3.9、语言切换：* 39 # 输入管理员密码 # 1 (中文) / 2 (英文) #

四、APP 添加门禁

4.1、下载 APP: App 可以通过 AppStore 或者“应用宝”下载，也可以扫描下图中二维码下载。APP 详细操作请查看通通锁使用手册。



4.2、APP 添加门禁机(绑定管理员):

第一步：打开通通锁 APP，点击 APP 右上角“+”

添加设备，选择“门锁”类型

第二步：点按触摸屏任意数字激活机器，在听到“请添加蓝牙管理员”语音提示后，APP 点击下一步

第三步：点击发现的门禁设备名称，等待几秒钟，机器提示“管理员添加成功”，点确定，机器添加完成

注意：如果以上步骤未能成功添加机器，请关闭手机 APP，关闭手机蓝牙后再重新打开 APP 与蓝牙，重复以上步骤。(添加设备过程要一直点亮设备键盘灯)

五、解除 APP 绑定 (恢复出厂设置)

第一步：机器断电，拆开机器底盖，把左上角跳线帽拔起插到右边的 2、3 脚；

第二步：给机器通电，待机器提示“请输入初始化密码”后把条线帽插回 1、2 脚，然后点亮机器数字键盘，输入 000#，机器提示“管理员删除成功”，机器恢复出厂设置完成。机器会清空所有指纹、卡、密码及手机管理员。

产品质量合格证
Qualification Card

PASS


TTLOCK ACCESS CONTROL

Instruction Manual V1.0

一、Main technical parameters of the product

Item	Value	Item	Value
Operating voltage	AC/DC 12V-24V	Storage	Card:1000, fingerprint:100
Operating current	< 100mA	Card type	MF1(IC)
Relative humidity	- 10℃—60℃	card reading distance	1—8CM
management style	TTLOCK APP	communication	Bluetooth / WiFi

二、Wiring Diagram

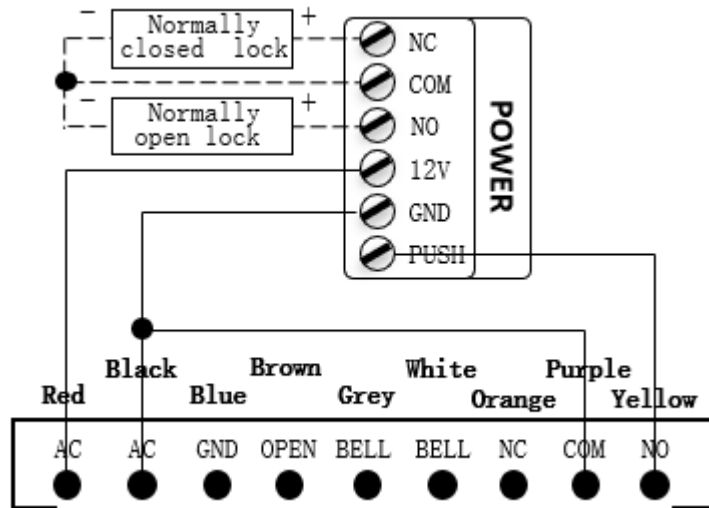

三、Programming operation instructions: Default unlock password:123456

Attention: Please light up the numbers before entering the password

3.1、Set administrator password: * 12 # 123456 # Enter password # Repeat password #

3.2、Modify administrator password: * 12 # Old password # new password # Repeat new password #

3.3、Add phone administrator: * 83 # administrator password #

3.4、Add password: * 80 # administrator password # 6-digit new password # Repeat new password #

3.5、Add fingerprint: * 80 # administrator password # Press your finger as instructed

3.6、Delete fingerprint: * 70 # administrator password # Delete all fingerprints

3.7、Add IC card: * 80 # administrator password # swipe

3.8、Delete IC card: * 69 # administrator password # Delete all IC cards

3.9、Language Switch: * 39 # administrator password # 1 (Chinese) / 2 (English) #

四、Add access control to the APP

4.1、Download the APP: The app can be downloaded from the AppStore or by scanning the QR code in the image on the right.

4.2、Add access control machine to APP:

Step 1: Open the Tongtong Lock APP, click the "+"

in the top right corner of the app to add a device, and select the "Door Lock" type

Step 2: Tap any number on the touch screen to activate the machine. After hearing the voice

prompt "Please add Bluetooth administrator", click "Next" in the APP

Step 3: Click on the name of the discovered access control device, wait for a few seconds, and the machine will prompt "Administrator added successfully". Click "OK", and the machine will complete the addition



五、Unbind APP (restore factory settings)

Step 1: Power off the machine, remove the bottom cover, and pull up the jumper cap on the top left corner and insert it into pins 2 and 3 on the right side;

Step 2: Power on the machine. After the machine prompts "Please enter the initialization password", insert the jumper back to pins 1 and 2.

Then, light up the machine's numeric keypad and enter 000#. The machine will prompt "Administrator deleted successfully", indicating that the factory reset is complete.

