



CAMEL SECURITY

Supplier of access control products

Touchless Surface Mount Exit Button


Model: K11

Surface mounted switch;
Non-contact induction;
NO/NC/COM;
5-20cm Induction distance adjustable;
0-30s delay control adjustment;
LED indicator color can be customized;
ABS material.



Features:

- Wide Voltage DC 12~24V
- Non-contact infrared sensing
- Standby Blue LED, Response Green LED
- 5-20cm Induction distance adjustable
- 0-30s delay control adjustment



View	Front(Standby)	Front(Response)	Side	Back
Photos				


Product Parameter

Model	K11
Size(mm)	86L*86W*17H
Weight(KG)	0.052
Power Supply	DC12-24V
Output Contact	NO/NC/COM
Sensitive Distance	5-20cm
Time Delay	0-30s

LED Indicator	Standby blue, Response green.
Material	ABS
Panel logo	Customizable
Mechanical Life	500,000 Tested aging test qualified
Operating Temp	-20°C~+55°C(-4-131F)
Operating humidity	0-95% (RH)
Package Quantity	1 PCS/box, 100 PCS/case.

Touchless Surface Mount Exit Button

Dimensions

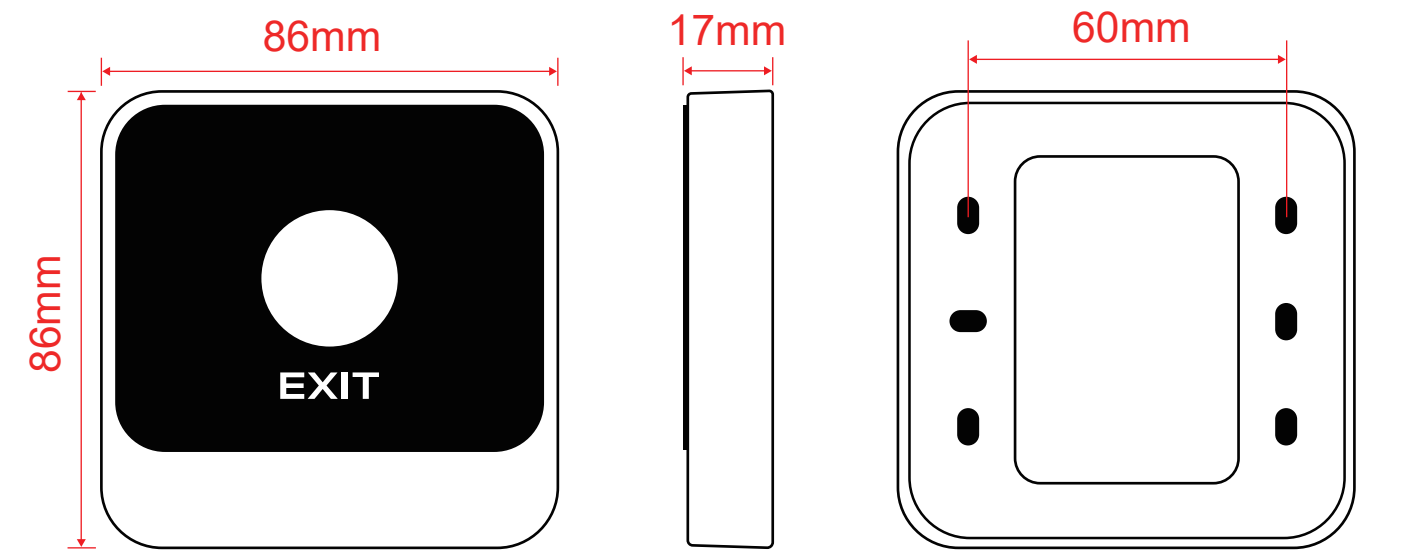

Support customized panel pattern, LED indicator color, the following example.

Model	K11		
Pattern	LOGO Custom	LOGO Custom	LED Color Custom
Photos			

Switch operation instructions		
Wiring instructions	Adjustable range	Time delay adjustment
Green line — NO White line — NC Yellow line — COM Black line — GND Red line — DC12/24V	D Potentiometers - Rotate to the left and the induction distance becomes shorter (Counterclockwise) - Rotate to the right and the induction distance becomes longer (Clockwise)	T Potentiometers - Rotation to the left and delay shortening (Counterclockwise) - Rotation to the right and delay extension (Clockwise)