

New Design Touchless Exit Button

Model: KA86G

Surface mounted switch;
Non-contact induction;
NO/NC/COM;
5-20cm Induction distance adjustable;
0-30s delay control adjustment;
LED indicator color can be customized;
ABS material.



► Features:

- Wide Voltage DC 12~24V
- NO/NC/COM
- Non-contact infrared sensing
- Standby Blue LED, Response Green LED
- 5-20cm Induction distance adjustable
- 0-30s delay control adjustment




View	Front (Standby)	Front (Response)	Side	Back
Photos				

► Product Parameter

Model	KA86G
Size(mm)	86L*86W*16H
Weight(KG)	0.093
Power Supply	DC12-24V
Output Contact	NO/NC/COM
Sensitive Distance	5-20cm distance is adjustable
Time Delay	0-30s delay adjustment

LED Indicator	Standby blue, Response green.
Material	Aluminium alloy + ABS
Panel logo	Customizable
Mechanical Life	500,000 Tested aging test qualified
Operating Temp	-20°C~+55°C(-4~131F)
Operating humidity	0-95% (RH)
Package Quantity	1 PCS/box, 100 PCS/ctn.

► Dimensions

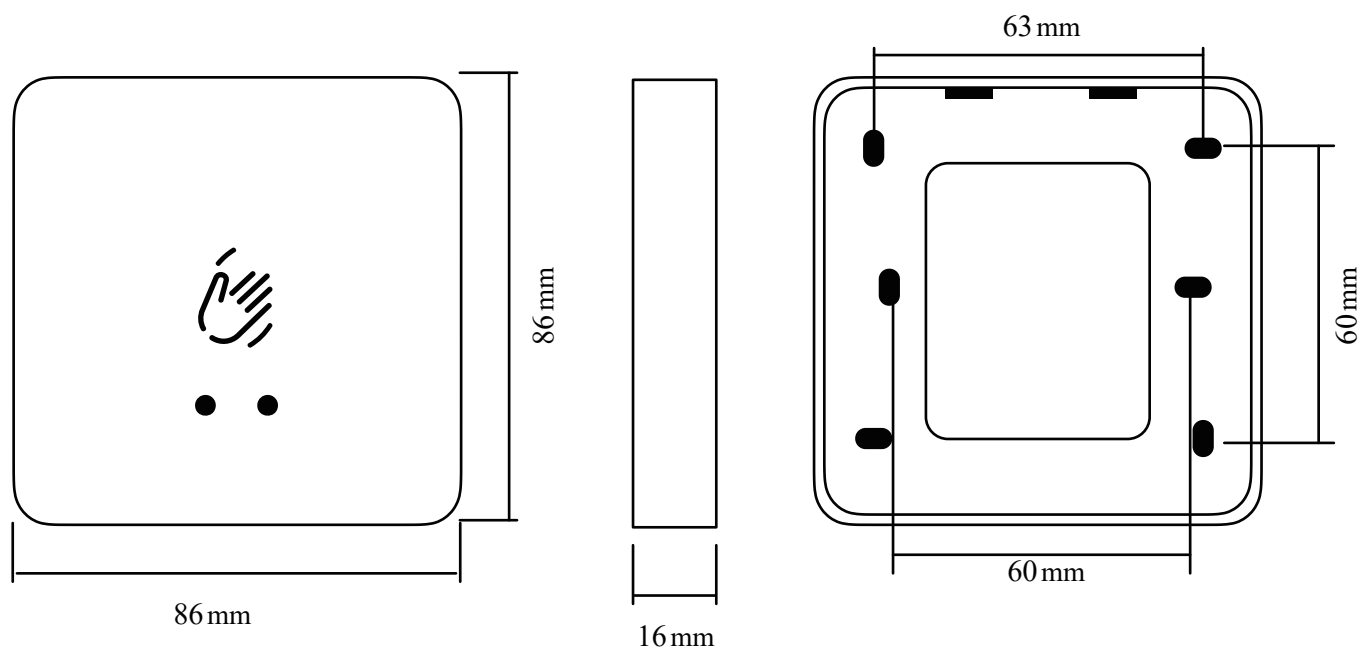

► Customized plate is available.

Model	KA86B	KA86W	KA86B-W	KA86G-W
Pattern	Color Customized	LOGO Customized	Color LOGO Customized	Color LOGO Customized
Photos				

Switch operation instructions		
Wiring instructions	Adjustable range	Time delay adjustment
	Rotate to the left and the induction distance becomes shorter (Counterclockwise) Rotate to the right and the induction distance becomes longer (Clockwise)	No delay (link "0") 3s delay (link "3") 6s delay (link "6") 9s delay (link "9")