

Touchless Flush Mounted Exit Button

Model: F40/F70

Flush mounted switch;
Non-contact induction;
NO/NC/COM;
5-25cm Induction distance adjustable;
0-30s delay control adjustment;
LED indicator color can be customized;
Stainless steel + ABS.

► Features:

- Wide Voltage DC 12~24V
- NO/NC/COM
- Non-contact infrared sensing
- Standby Blue LED, Response Green LED




Model	F40			F70		
View	Front	Side	Back	Front	Side	Back
Photos						

► Product Parameter

Model	F40	F70
Size(mm)	115L*40W*26H	115L*70W*26H
Power Supply	DC12-24V	
Output Contact	NO/NC/COM	
Sensitive Distance	5-25cm adjustable	
Time Delay	0-30s adjustable	
Connection	Terminal Blocks	

LED Indicator	Standby blue, Response green. (Customizable colors)
Material	Stainless steel + ABS
Panel logo	Customizable
Mechanical Life	500,000 Tested aging test qualified
Operating Temp	-20℃~+55℃(-4~131F)
Operating humidity	0-95% (RH)
Package Quantity	1 PCS/box, 100 PCS/case.

► Dimensions

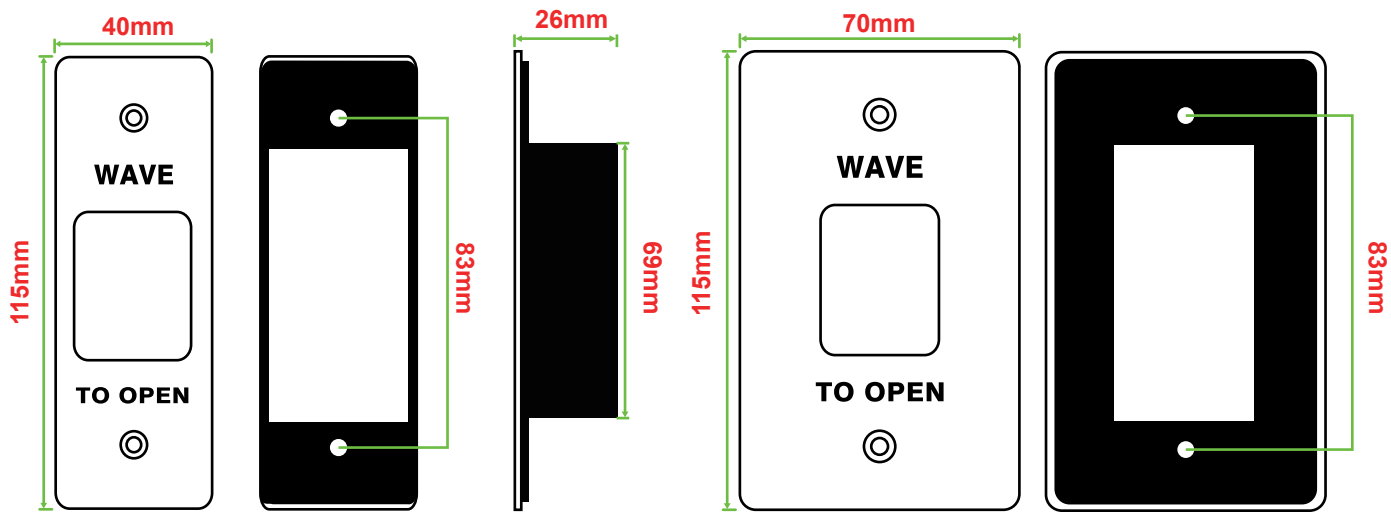

Switch operation instructions		
Wiring instructions	Adjustable range	Time delay adjustment
Green line White line Yellow line Black line Red line NO NC COM GND DC12/24V	1 3362 3 D Potentiometers ↶ Rotate to the left and the induction distance becomes shorter (Counterclockwise) ↷ Rotate to the right and the induction distance becomes longer (Clockwise)	1 3362 3 T Potentiometers ↶ Rotation to the left and delay shortening (Counterclockwise) ↷ Rotation to the right and delay extension (Clockwise)