



KM31-Antique Copper

Infrared Inductive Door Switch

Touch-free infrared sensing exit button;
NO/NC/COM;
5 - 20cm sensing distance adjustable;
0 - 30s delay adjustable;
Zinc alloy material.



VDC 12~24



Touch-free



Dual-color



Sensing distance
adjustable



Delay
adjustable

Product Standard Features


- Operating voltage: DC12-24V
- Standby blue light, operating green light


Basic Parameters

Product Model	KM31
Size (mm)	80L*32W*17H
Net Weight (kg)	0.086
Operating Voltage	DC12-24V
Contact Output	NO / NC / COM
Housing Material	Zinc Alloy
LED Indicator	Standby blue light, operating green light
Sensing Distance	5-20cm
Sensing Delay	0-30s
Endurance Test	500,000 aging test qualified
Installation Method	Surface mounting
Operating Temperature	-20°C~55°C (-4~131°F)
Operating Humidity	0-95% (non-condensing)
Packing Quantity	1 piece/box, 100 pieces/carton
Carton Size	41*41*12(cm) , 11kg

Angle	Front View (Standby)	Front View (Active)
Picture		
Angle	Side View	Back View
Picture		

Dimensional Drawing

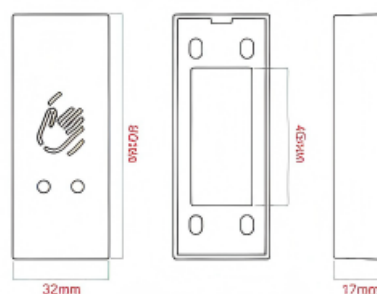

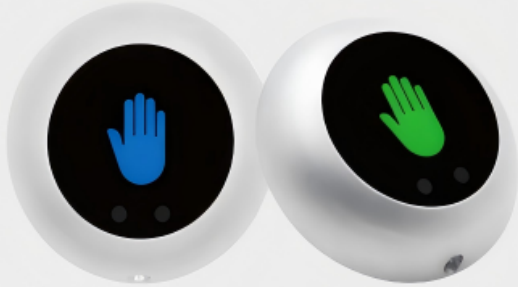

KM12

Infrared Touchless Exit Button

Touchless infrared sensing exit button;
NO/NC/COM;

5 - 20cm sensing distance adjustable;

0 - 30s delay adjustable;

Zinc alloy material + black acrylic panel.



VDC 12~24



Touchless



Dual-color



Sensing
Distance



Delay Time

Product Standard Functions

- Operating Voltage: DC12-24V
- Standby Blue Light, Operating Green Light

Basic Parameters

Product Model	KM12
Size (mm)	72L*72W*16H
Weight (kg)	0.1
Operating Voltage	DC12-24V
Output Interface	NO / NC / COM
Housing Material	Zinc Alloy + Black Acrylic Panel
LED Indicator	Standby Blue Light, Operating Green Light
Sensing Distance	5-20cm
Delay Time	0-30s
Endurance Test	500,000 Aging Tests Passed
Installation Method	Surface Mount
Operating Temperature	-20°C~55°C (-4~131°F)
Operating Humidity	0-95% (Non-condensing)
Packaging	1 Piece / Box, 100 Boxes / Carton
Carton Size	41*41*12(cm) , 12kg

Angle	Front (Standby)	Front (Operating)
Image		
Angle	Side	Back
Image		

Dimensions

