


Touchless Sensor with Manual override Button

Model: V40 / F70

Self-reset button;
Non-contact induction;
NO/NC/COM;
5-25cm Induction distance adjustable;
0-30s delay control adjustment;
LED indicator color can be customized.

► Features:

- Wide Voltage DC 12~24V
- NO/NC/COM
- Non-contact infrared sensing
- Standby Blue LED, Response Green LED




Model	V40			V70		
View	Front	Side	Back	Front	Side	Back
Photos						

► Product Parameter

Model	V40	V70
Size(mm)	115L*40W*33H	115L*70W*33H
Power Supply	DC12-24V	
Output Contact	NO/NC/COM	
Sensitive Distance	5-25cm adjustable	
Time Delay	0-30s adjustable	
Connection	Terminal Blocks	

LED Indicator	Standby blue, Response green. (Customizable colors)
Material	Stainless steel
Panel logo	Customizable
Mechanical Life	500,000 Tested aging test qualified
Operating Temp	-20°C~+55°C(-4~131°F)
Operating humidity	0-95% (RH)
Package Quantity	1 PCS/box, 100 PCS/case.

► Dimensions

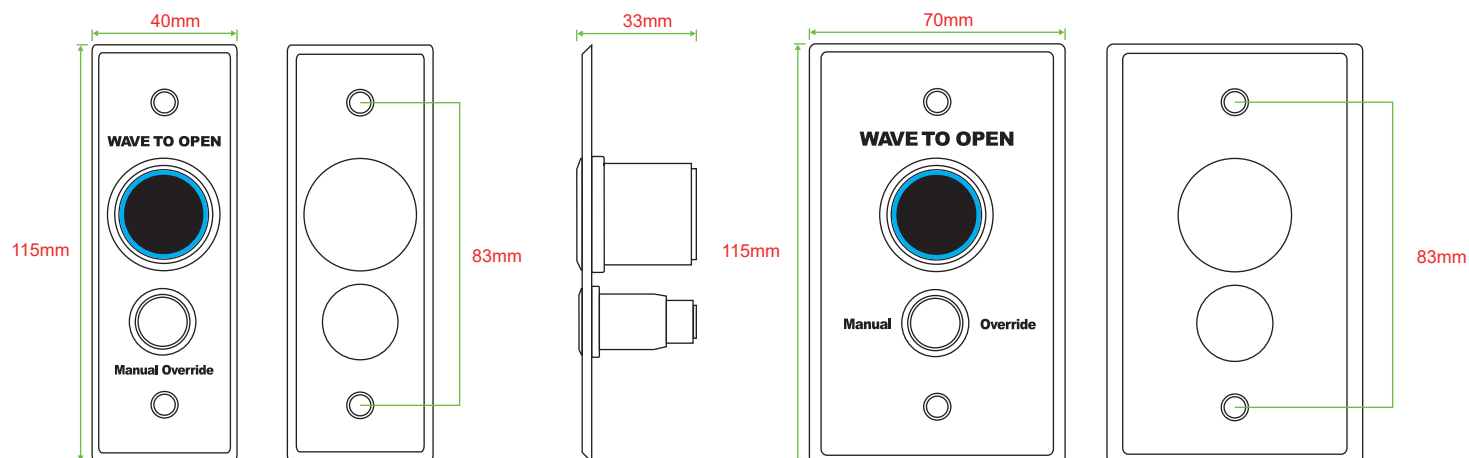

► Support customized panel pattern, LED indicator color, the following example.

Model	V40		V70	
Pattern	LOGO Custom	LOGO Custom	LOGO Custom	LOGO Custom
Photos				

Switch operation instructions

Adjustable range	Time delay adjustment
D Potentiometers Rotate to the left and the induction distance becomes shorter (Counterclockwise) Rotate to the right and the induction distance becomes longer (Clockwise)	T Potentiometers Rotation to the left and delay shortening (Counterclockwise) Rotation to the right and delay extension (Clockwise)