

Touchless Sensor with Manual override Button

Model: V86

Self-reset button;
Non-contact induction;
NO/NC/COM;
5-25cm Induction distance adjustable;
0-30s delay control adjustment;
LED indicator color can be customized.



► Features:

- Wide Voltage DC 12~24V
- NO/NC/COM
- Non-contact infrared sensing
- Standby Blue LED, Response Green LED




Model	V86		
View	Front	Side	Back
Photos			

► Product Parameter

Model	V86
Size(mm)	86L*86W*33H
Power Supply	DC12-24V
Output Contact	NO/NC/COM
Sensitive Distance	5-25cm adjustable
Time Delay	0-30s adjustable
Connection	Terminal Blocks

LED Indicator	Standby blue, Response green. (Customizable colors)
Material	Stainless steel
Panel logo	Customizable
Mechanical Life	500,000 Tested aging test qualified
Operating Temp	-20°C~+55°C(-4~131°F)
Operating humidity	0-95% (RH)
Package Quantity	1 PCS/box, 100 PCS/case.

► Dimensions

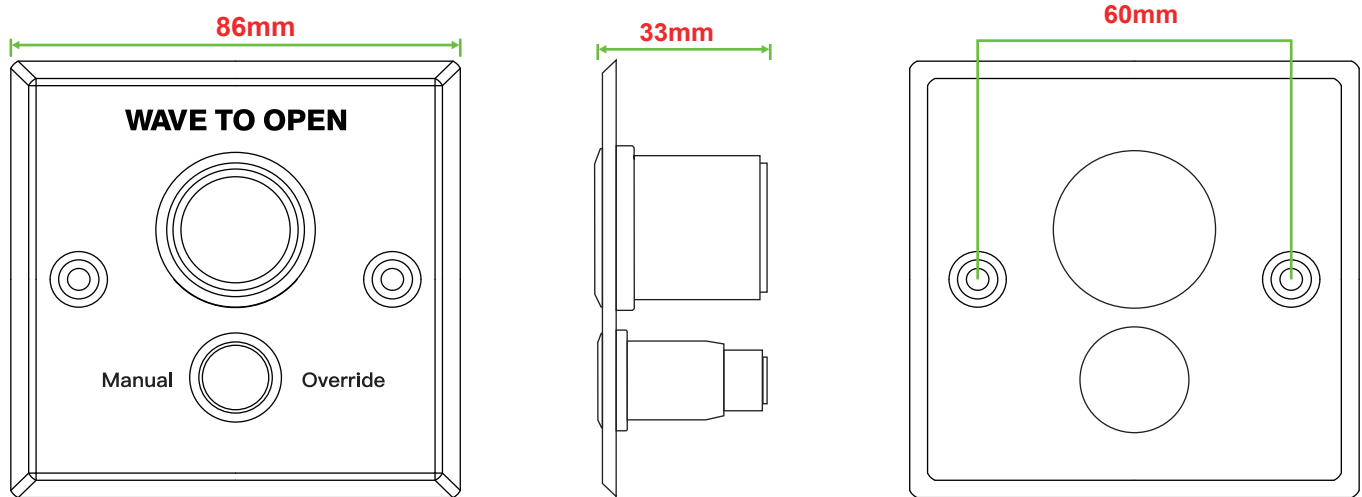

► Support customized panel pattern, LED indicator color, the following example.

Model	V86	
Pattern	LOGO Custom	LOGO Custom
Photos		

Switch operation instructions

Adjustable range	Time delay adjustment
1 3362 3 - Rotate to the left and the induction distance becomes shorter (Counterclockwise) - Rotate to the right and the induction distance becomes longer (Clockwise)	1 3362 3 - Rotation to the left and delay shortening (Counterclockwise) - Rotation to the right and delay extension (Clockwise)