

Touchless Surface Mount Exit Button

Model: K40A/K40B

Surface Mount NO TOUCH Exit Button;

NO/NC/COM;

Sensitive Distance Adjustable 5-20cm;

Time Delay Adjustable 0~30s;

Customizable Waterproof Function(K40A-W/K40B-W);

LED indicator color can be customized;

ABS material.



► Features:

- Wide Voltage DC 12~24V
- NO/NC/COM
- No Touch Style Exit Button
- Standby Blue LED, Response Green LED
- 5-20cm Induction distance adjustable
- 0-30s delay control adjustment




Model	K40A(White)			K40B(Black)		
View	Front	Side	Back	Front	Side	Back
Photos						

► Product Parameter

Model	K40A/K40B	LED Indicator	Standby blue, Response green. (Customized)
Size(mm)	115L*40W*14H	Material	ABS
Weight(KG)	0.08	Panel logo	Customizable
Power Supply	DC12-24V	Mechanical Life	500,000 Tested aging test qualified
Output Contact	NO/NC/COM	Operating Temp	-20°C~+55°C(-4~131F)
Sensitive Distance	5-20cm is adjustable (Customized)	Operating humidity	0-95% (RH)
Time Delay	0-30s is adjustment (Customized)	Package Quantity	1 PCS/box, 100 PCS/case.

► Dimensions

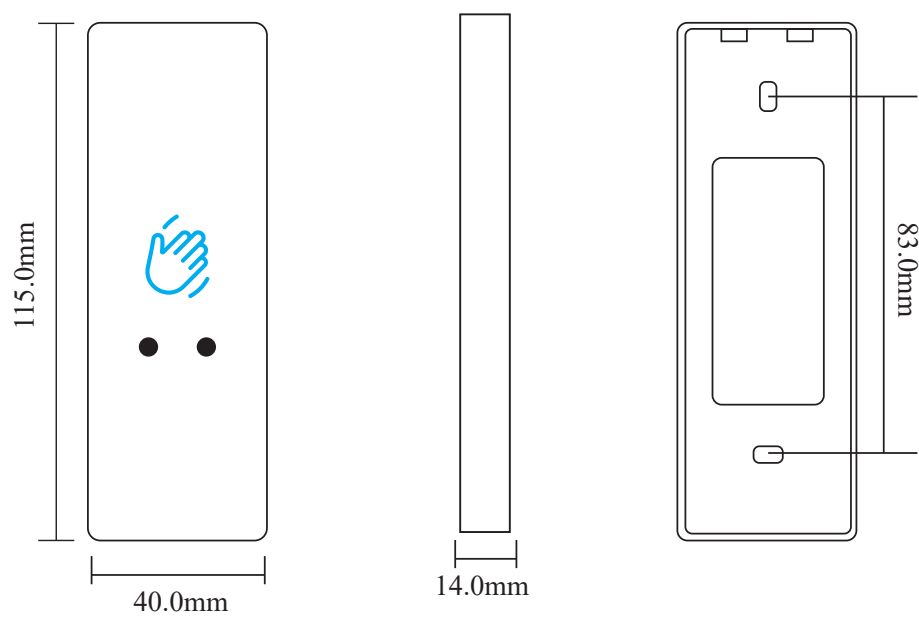

► Customized plate is available.

Model	K40A(White)		K40B(Black)	
Pattern	LED Color Customized	LOGO Customized	LED Color Customized	LOGO Customized
Photos				

Switch operation instructions		
Wiring instructions	Adjustable range	Time delay adjustment
Green line NO White line NC Yellow line COM Black line GND Red line DC12/24V	D Potentiometers Turn left near (Counterclockwise) Turn right far (Clockwise)	T potentiometer Turn left short (Counterclockwise) Turn right long (Clockwise)