

Touchless Surface Mount Exit Button

Model: K86A/K86B

Surface Mount NO TOUCH Exit Button;

NO/NC/COM;

Sensitive Distance Adjustable 5-20cm;

Time Delay Adjustable 0~30s;

Customizable waterproof function(K86A-W/K86B-W);

LED indicator color can be customized;

ABS material.



► Features:

- Wide Voltage DC 12~24V
- NO/NC/COM
- No Touch Style Exit Button
- Standby Blue LED, Response Green LED
- 5-20cm Induction distance adjustable
- 0-30s delay control adjustment




Model	K86A(White)			K86B(Black)		
View	Front	Side	Back	Front	Side	Back
Photos						

► Product Parameter

Model	K86A/K86B
Size(mm)	86L*86W*14H
Weight(KG)	0.084
Power Supply	DC12-24V
Output Contact	NO/NC/COM
Sensitive Distance	5-20cm is adjustable (Customized)
Time Delay	0-30s is adjustment (Customized)

LED Indicator	Standby blue, Response green. (Customized)
Material	ABS
Panel logo	Customizable
Mechanical Life	500,000 Tested aging test qualified
Operating Temp	-20°C ~ +55°C (-4~131°F)
Operating humidity	0-95% (RH)
Package Quantity	1 PCS/box, 100 PCS/case.

► Dimensions

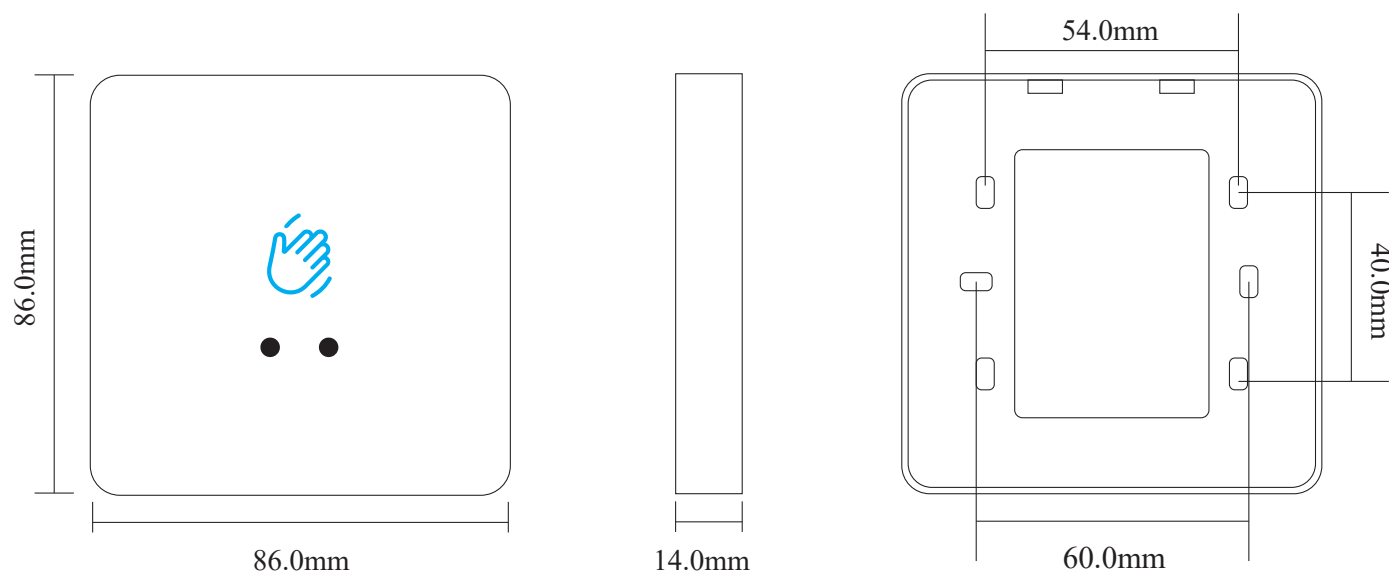

► Customized plate is available.

Model	K86A(White)		K86B(Black)	
Pattern	LED Color Customized	LOGO Customized	LED Color Customized	LOGO Customized
Photos				

Switch operation instructions		
Wiring instructions	Adjustable range	Time delay adjustment
	D Potentiometers - Turn left near (Counterclockwise) - Turn right far (Clockwise)	T potentiometer - Turn left short (Counterclockwise) - Turn right long (Clockwise)