

Touchless Surface Mount Exit Button

Model: T4NT / T4NTW

Surface mounted switch;
Non-contact induction;
NO/NC/COM;
5-20cm Induction distance adjustable;
0-30s delay control adjustment;
LED indicator color can be customized;
Zine alloy material.



Features:

- Wide Voltage DC 12~24V
- Non-contact infrared sensing
- Standby Blue LED, Response Green LED



View	Front(Standby)	Front(Response)	Side	Back (T4NT)	Back (T4NTW)
Photos					

Product Parameter


Model	T4NT (T4NTW)
Size(mm)	81L*31W*24H
Weight(KG)	0.1
Power Supply	DC12-24V
Output Contact	NO/NC/COM
Sensitive Distance	5-20cm
Time Delay	0-30s

LED Indicator	Standby blue, Response green.
Material	Zine alloy material.
Panel logo	Customizable
Mechanical Life	500,000 Tested aging test qualified
Operating Temp	-20°C~+55°C(-4-131F)
Operating humidity	0-95% (RH)
Package Quantity	1 PCS/box, 100 PCS/case.

Touchless Surface Mount Exit Button

2

Dimensions

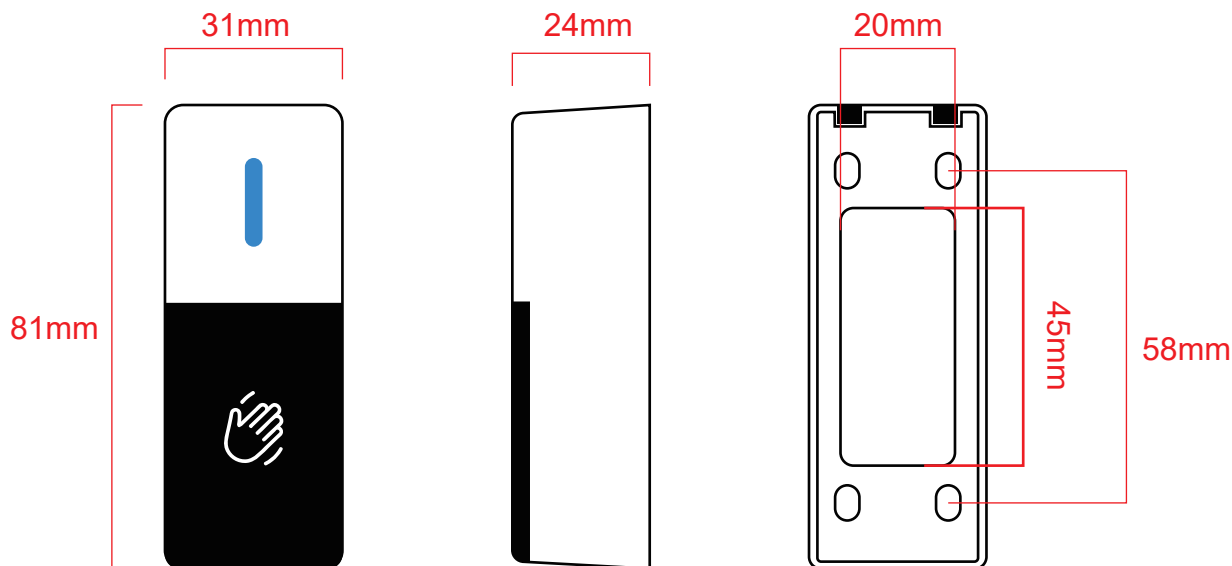

Support customized panel pattern, LED indicator color, the following example.

Model	T4NT		
Pattern	LOGO Custom	LOGO Custom	LED Color Custom
Photos			

Switch operation instructions

Wiring instructions	Adjustable range	Time delay adjustment
	D Potentiometers - Rotate to the left and the induction distance becomes shorter (Counterclockwise) - Rotate to the right and the induction distance becomes longer (Clockwise)	T Potentiometers - Rotation to the left and delay shortening (Counterclockwise) - Rotation to the right and delay extension (Clockwise)